

## BUTT HINGE

Cold rolled butt hinge in steel with or without countersunk holes. Universal left and right mounting.



### MATERIAL

**Hinge:** Steel, zinc plated or untreated

**Pin:** Steel, zinc plated or untreated

### RELATED PRODUCTS

**Other materials:** 6-496


Use the Index Code at [industrilas.com](http://industrilas.com)

### TECHNICAL INFORMATION

Please note that the J-measurement describes the largest diameter of the countersunk - and not the diameter of the hole.

For the holed hinges, we recommend any of the following screws for mounting:

- Countersunk screws against DIN EN ISO 2009.
- Screws with raised countersunk head against DIN EN ISO 2010.
- Countersunk screws against DIN EN ISO 7046-1.
- Screws with raised countersunk head against DIN EN ISO 7047.

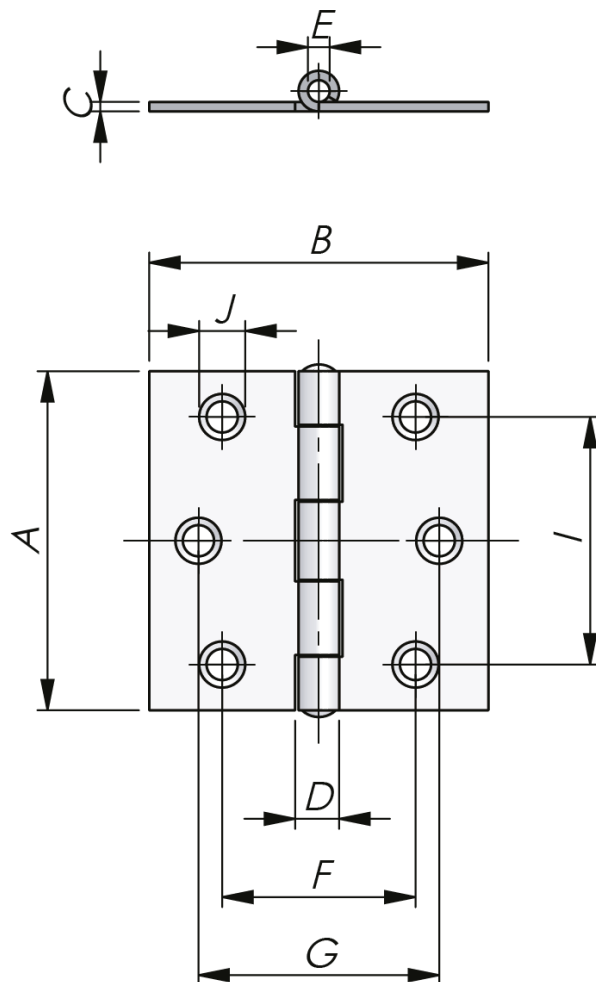

**Industrilas**  
— When access counts —

P/N	Surface treatment	A	B	C	D	E	F	G	I	J	Holes
3420-202000-5050	Untreated	50	50	1,4	6,2	3,0	-	-	-	-	-
3420-202000-6060	Untreated	60	60	1,4	6,2	3,0	-	-	-	-	-
3420-202000-8080	Untreated	80	80	1,4	6,2	3,0	-	-	-	-	-
3421-212001-5050	Zinc plated	50	50	1,4	6,2	3,0	18,0	35,0	35,0	5,8	6 x
3421-212001-6060	Zinc plated	60	60	1,4	6,2	3,0	18,0	45,0	45,0	5,8	6 x
3421-212001-7070	Zinc plated	70	70	1,4	6,2	3,0	41,0	54,0	55,0	6,8	6 x
3421-212001-8080	Zinc plated	80	80	1,4	6,2	3,0	41,0	65,0	65,0	6,8	6 x