



QUARTER-TURN LATCH STAINLESS STEEL 18 MM

This complete latch consists of housing, nut, insert, washer, screw and cam. To achieve protection degree IP66, an O-ring and pour-in-place foamed polyurethane gasket is applied. The latch can be supplied un-assembled, pre-assembled with enclosed cam or completely assembled. Waterproof according to NEMA 4.



MATERIAL

Cam: Stainless steel 304 or 316

Housing: Stainless steel 303 or 316

Insert: Stainless steel 303 or 316



Nut: Stainless steel 303 or 316

TECHNICAL INFORMATION

* = also classed "Waterproof according to NEMA 4"

Standards: IP66, NEMA 4

Cutout: COMBI

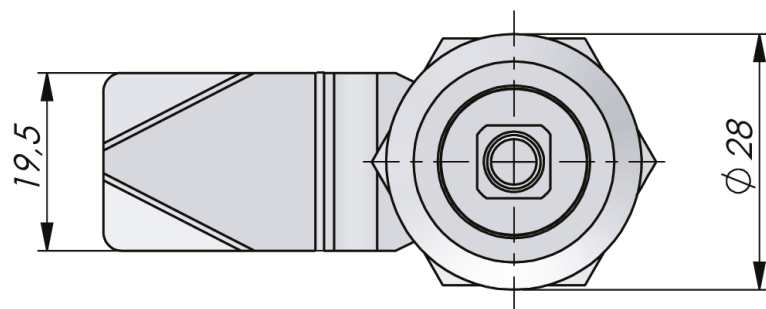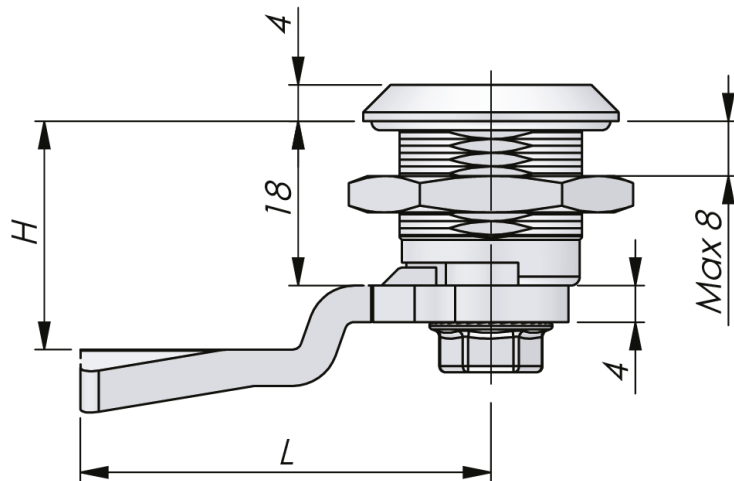

Make your selections in each column to create your article number (AAAA-BCCDEF-HHLL)

AAAA Housing		B Nut	CC Insert	D Material insert and housing	E Assembly	F Cam	HHLL H/L in mm
2313	Stainless steel 303	3 SS 303	01 Square 6	3 SS 303	0 IP54 - not assembled	3 SS 304	0000 No cam
			03 Square 7	9 SS 316			0445 4 / 45
2319	Stainless steel 316	9 SS 316	05 Square 8		1 IP66 - not assembled	9 SS 316	0645 6 / 45
			07 Square 8 / slotted		2 IP54 - enclosed cam		0845 8 / 45
			08 Square 8 / M6		3 IP66 - enclosed cam		1045 10 / 45
			11 Square 8 / recessed		4 IP54 - assembled		1245 12 / 45
			14 Triangle 7		5 IP66 - assembled		1445 14 / 45
			15 Triangle 8				1645 16 / 45
			16 Triangle 10				1845 18 / 45
			22 Double Bit 3				2045 20 / 45
			24 Double Bit 5				2245 22 / 45
			26 Slotted				2445 24 / 45
			41 Slotted recessed				2645 26 / 45
							2845 28 / 45
							3045 30 / 45
							3245 32 / 45
							3445 34 / 45
							3645 36 / 45
							3845 38 / 45
							4045 40 / 45
							4245 42 / 45
							4445 44 / 45
							4645 46 / 45
							4845 48 / 45
							5045 50 / 45

