

QUARTER-TURN CLASSIC STAINLESS STEEL 30 MM

Protection degree IP65 is achieved by an O-ring on the insert and a pour-in-place foamed polyurethane gasket on the housing.



MATERIAL

Cam: Stainless steel 304 or 316

Housing: Stainless steel 303 or 316

Insert: Stainless steel 303 or 316

Nut: Stainless steel 303 or 316

RELATED PRODUCTS

Handles and knobs: 2-360

Keys: 2-372, 2-370

Cams: 2-480, 2-520, 2-510



Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Protection degree IP65 is achieved by an O-ring on the insert and a flat gasket on the housing.

Cutout: COMBI

Standards: IP65

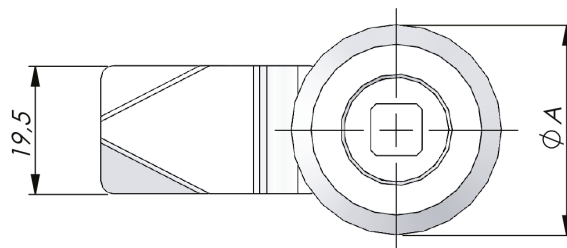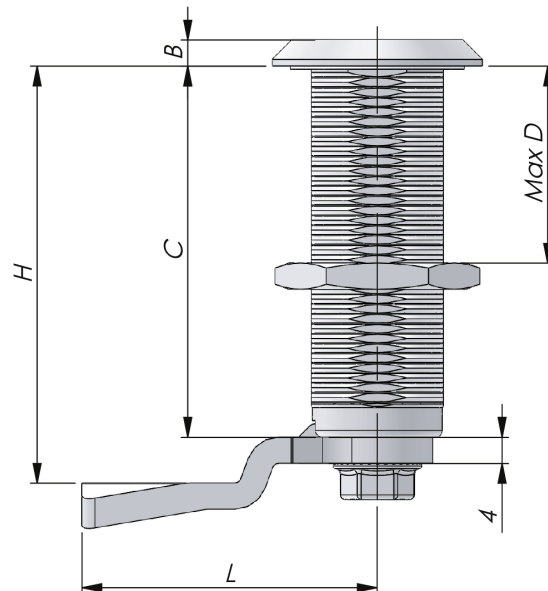

Make your selections in each column to create your article number (AAAA-BCCDEF-HHLL)

AAAA Housing	B Nut	CC Insert	D Material insert and housing	E Assembly	F Cam	HHLL H/L in mm
2330 A=28, B=3, C=30, D=21	3 SS 303	01 Square 6	3 SS 303	0 IP54 - not assembled	3 SS 304	0000 No cam
		03 Square 7	9 SS 316			1645 16 / 45
	9 SS 316	05 Square 8		1 IP65 - not assembled	9 SS 316	1845 18 / 45
		07 Square 8 / slotted		2 IP54 - enclosed cam		2045 20 / 45
		08 Square 8 / M6		3 IP65 - enclosed cam		2245 22 / 45
		11 Square 8 / recessed		4 IP54 - assembled		2445 24 / 45
		14 Triangle 7		5 IP65 - assembled		2645 26 / 45
		15 Triangle 8				2845 28 / 45
		16 Triangle 10				3045 30 / 45
		22 Double Bit 3				3245 32 / 45
		24 Double Bit 5				3445 34 / 45
		26 Slotted				3645 36 / 45
		41 Slotted recessed				3845 38 / 45
						4045 40 / 45
						4245 42 / 45
						4445 44 / 45
						4645 46 / 45
						4845 48 / 45
						5045 50 / 45
						5245 52 / 45
						5445 54 / 45
						5645 56 / 45
						5845 58 / 45
						6045 60 / 45
						6245 62 / 45
						6445 64 / 45
						6645 66 / 45
						6845 68 / 45
						7045 70 / 45
						7245 72 / 45
						7445 74 / 45
						7645 76 / 45
						7845 78 / 45
						8045 80 / 45
						8245 82 / 45
						8445 84 / 45
						8645 86 / 45

