




QUARTER-TURN VIBRATION RESISTANT STAINLESS STEEL 18 MM

This vibration resistant quarter-turn latch consists of acid-proof AISI 316 components. You design the latch to accommodate your needs by combining your choices of housing, nut, insert, washer, screw and cam. The latch can be delivered un-assembled, pre-assembled with enclosed cam or fully assembled.

Protection degree IP66 is achieved by using an O-ring on the insert and a PUR-gasket on the housing.

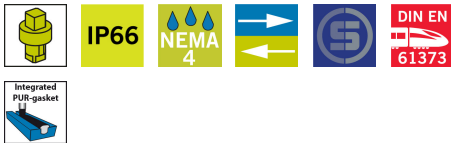

MATERIAL

Cam: Stainless steel 304 or 316

Housing: Stainless steel 316

Insert: Stainless steel 316

Nut: Stainless steel 303 or 316

Screw: Stainless steel 304

Washer: Stainless steel 304

RELATED PRODUCTS

Similar products: 6-134a

Other materials: 2-020

Handles and knobs: 2-360

Keys: 2-372, 2-380, 2-370

Cams: 2-510, 2-520, 2-481, 2-491



Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Latch is supplied with screw with mechanical thread lock.

Cutout: COMBI

Standards: IP66, NEMA 4, DIN EN 61373

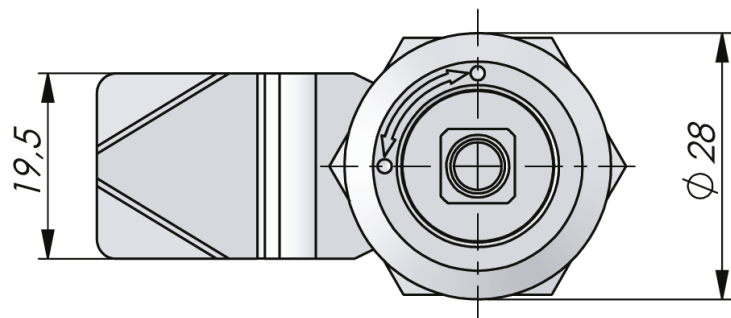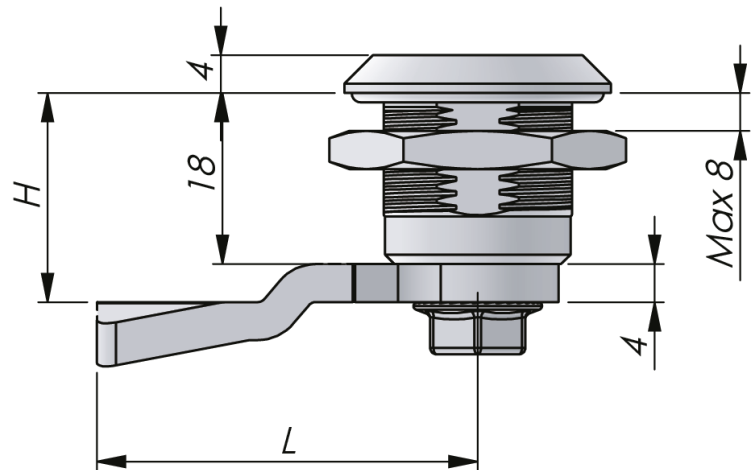

Industrilas
— When access counts —

Make your selections in each column to create your article number (AAAA-BCCDEF-HHLL)

AAAA Housing	B Nut	CC Insert	D Material insert and housing	E Assembly	F Cam	HHLL H/L in mm
2419 Stainless steel 316	3 SS 303	01 Square 6	9 SS 316	6 IP66 PUR - not assembled	3 SS 304	0000 No cam
		03 Square 7				0445 4 / 45
	9 SS 316	05 Square 8		7 IP66 PUR - enclosed cam	9 SS 316	0645 6 / 45
		08 Square 8 / M6		8 IP66 PUR - assembled		0845 8 / 45
		13 Triangle 6,5				1045 10 / 45
		14 Triangle 7				1245 12 / 45
		15 Triangle 8				1445 14 / 45
		16 Triangle 10				1645 16 / 45
						1845 18 / 45
		17 Triangle 10 / M5				2045 20 / 45
						2245 22 / 45
		22 Double Bit 3				2445 24 / 45
		24 Double Bit 5				2645 26 / 45
		26 Slotted				2845 28 / 45
						3045 30 / 45
						3245 32 / 45
						3445 34 / 45
						3645 36 / 45
						3845 38 / 45
						4045 40 / 45
						4245 42 / 45
						4445 44 / 45
						4645 46 / 45
						4845 48 / 45
						5045 50 / 45

