

**Performance:**

These heaters are used in enclosures where damage from condensation must be prevented or where the temperature may not fall below a minimum value. The aluminium profile heater body design has a chimney effect and distributes the heat evenly. The pressure clamp connectors save time and simplify installation.

- Screw terminal connector
- Dynamic heating up
- Wide voltage range
- Temperature limiting
- With indicator showing on/off
- Energy saving
- Clip fixing
- Quick installation



LK 140-15W



LK 140-150W

**SPECIFICATION**

Operating voltage	110-250V AC/DC
Thermal element	PTC thermistor (PTC)
Heater body	Aluminium profile, anodised silver
Connecting type	Screw terminal
Connecting case	UL94 V-0, black plastic
Fitting position	Vertical
Operating	-30°C~+70°C
Protection	IP20
Certificate	CE



Heater burn protective cover (optional)



(15W-75W) Universal





(100W-150W) Universal

Operating voltage below 140V AC/DC will reduce the heat output by about 10%

Model	Heat output (W) 20 °C ambient temperature	Maximum allowable current (A)	L (mm)	Weight (kg)
LK140-15W	15W	1.5	70	0.25
LK140-30W	30W	2.5	70	0.25
LK140-45W	45W	3.0	70	0.25
LK140-60W	60W	3.5	70	0.25
LK140-75W	75W	4.0	70	0.25
LK140-100W	100W	4.5	140	
LK140-150W	150W	9.0	140	0.40

**DIMENSION (mm)**

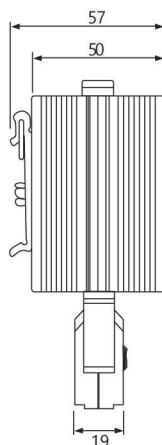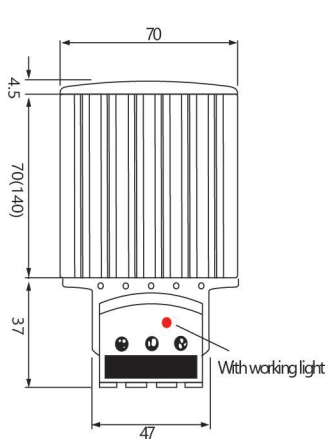

**WIRING DIAGRAM**

