



# QUARTER-TURN VIBRATION RESISTANT 18 MM

This vibration resistant quarter-turn latch has integrated padlock loop. When a padlock is placed in the loop, the insert is blocked from access. The latch consists of your choice of housing, nut, insert, washer, screw and cam.

Classified as IP65 and waterproof according to NEMA 4 by using an O-ring on the insert and a flat gasket on the housing.

The latch clicks to open and closed positions with good tactile feedback. Vibration resistant according to DIN EN 61373.

The latch is delivered un-assembled, pre-assembled with enclosed cam or fully assembled.



## MATERIAL


- Earthing nut:** Zinc die cast, zinc plated
- Housing:** Zinc die cast, chrome plated or black texture powder coated
- Insert:** Zinc die cast, chrome plated or black texture powder coated
- Cam, screw and washer:** Steel, zinc plated
- Standard nut:** Zinc die cast, zinc plated

## RELATED PRODUCTS

- Cams:** 2-481, 2-491
- Keys:** 2-370
- Use the Index Code at [industrilas.com](http://industrilas.com)

## TECHNICAL INFORMATION

- Cutout:** COMBI
- Standards:** IP65, NEMA 4, DIN EN 61373

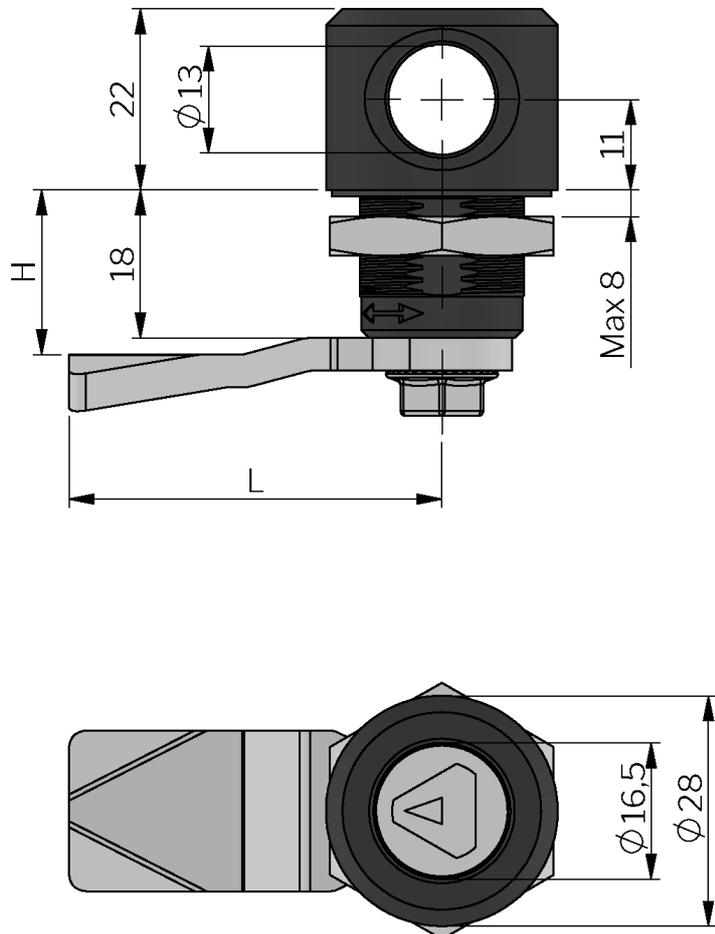

**Make your selections in each column to create your article number (AAAA-BCCDEF-HLL)**

AAAA Housing	B Nut	CC Insert	D Surface - insert	E Assembly	F Cam	HHLL H/L in mm								
2232 Zinc, chrome plated	0 SN	01 Square 6	2 Chrome	2 IP54 - enclosed cam	0 Steel	0000 No cam								
2236 Zinc, black powder coated	1 EN	03 Square 7	6 Black	IP54 - enclosed cam		0445 4 / 45								
	2 SN+TUF	05 Square 8				3 IP65 - enclosed cam	0645 6 / 45							
	4 EN+TUF			07 Square 8 / slotted					0845 8 / 45					
				08 Square 8 / M6					4 IP54 - assembled	1045 10 / 45				
				11 Square 8 / recessed									1245 12 / 45	
				14 Triangle 7									5 IP65 - assembled	1445 14 / 45
				15 Triangle 8										1645 16 / 45
				16 Triangle 10										1845 18 / 45
				17 Triangle 10 / M5										2045 20 / 45
				18 Triangle 10 / M6										2245 22 / 45
				19 Triangle 10 / SEN										2445 24 / 45
				21 Triangle 10 - radius ES3										2645 26 / 45
				22 Double Bit 3										2845 28 / 45
				24 Double Bit 5										3045 30 / 45
				26 Slotted										3245 32 / 45
				28 Slotted with arrow										3445 34 / 45
				29 Slotted recessed										3645 36 / 45
				31 Hexagon 8,5										3845 38 / 45
				32 Hexagon 11										4045 40 / 45
				34 Recessed hexagon 8										4245 42 / 45
				35 Recessed hexagon 10										4445 44 / 45
				36 Recessed hex 8 / 3 mm pin										4645 46 / 45
				37 Solid plug										4845 48 / 45
				39 Triangle 10 - radius										5045 50 / 45

SN = Standard nut. EN = Earthing nut.

