



# QUARTER-TURN VIBRATION RESISTANT 18 MM

You design this vibration resistant quarter-turn latch to accommodate your needs by combining your choices of housing, nut, insert, washer, screw and cam. The latch can be delivered un-assembled, pre-assembled with enclosed cam or fully assembled.

The latch clicks to open and closed positions with good tactile feedback.

Vibration resistant according to DIN EN 61373. Available with IP66 protection and waterproof according to NEMA 4.



## MATERIAL

**Housing:** Zinc die cast, chrome plated, black texture powder coated, zinc plated with black PA6 collar or glass fiber reinforced Polyamide PA6

**Insert:** Zinc die cast, chrome plated or black texture powder coated

**Cam and screw:** Steel, zinc plated

**Standard nut:** Zinc die cast, zinc plated

**Earthing nut:** Zinc die cast, zinc plated

**Washer:** Stainless steel 304

## RELATED PRODUCTS

**Similar products:** 2-120

**Housings:** 2-021

**Inserts:** 2-022

**Handles and knobs:** 2-360

**Keys:** 2-372, 2-380, 2-370

**Accessories:** 2-420, 2-590


**Cams:** 2-481, 2-491, 2-510, 2-520

Use the Index Code at [industrilas.com](http://industrilas.com)

## TECHNICAL INFORMATION

**Cutout:** COMBI

**Standards:** IP66, NEMA 4, DIN EN 61373

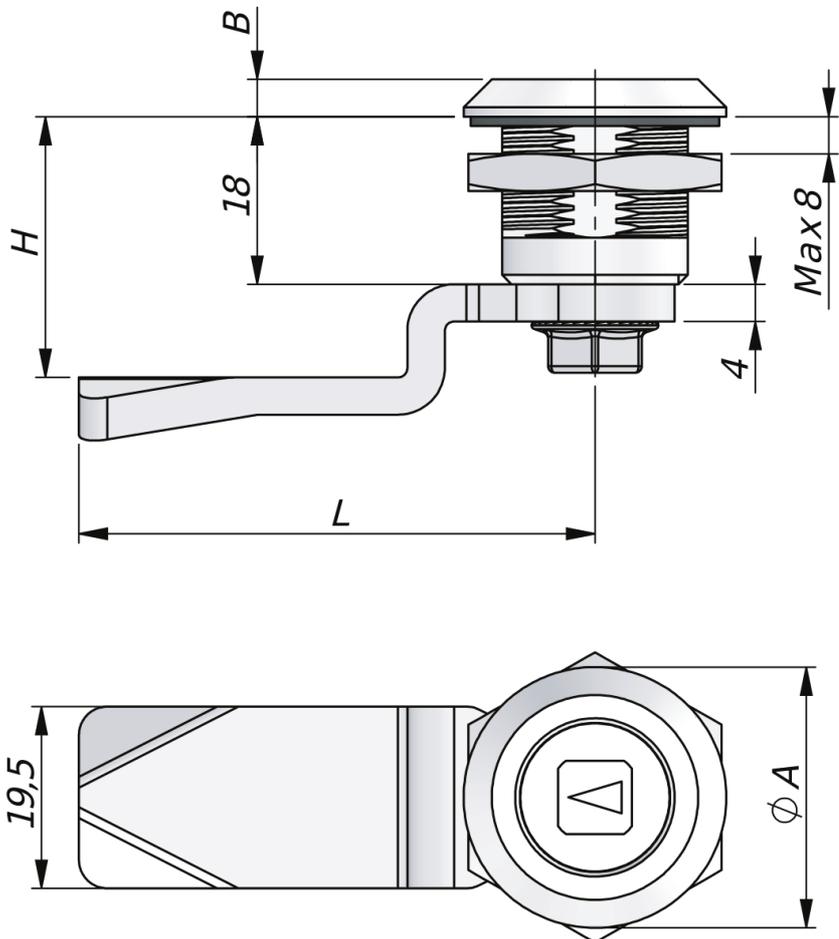

**Make your selections in each column to create your article number (AAAA-BCCDEF-HLL)**

AAAA Housing	B Nut	CC Insert	D Surface - insert	E Assembly	F Cam	HLL H/L in mm
2412 Zinc, chrome plated A=28, B=4	0 SN	01 Square 6	2 Chrome	2 IP54 - enclosed cam	0 Steel	0000 No cam
	1 EN	03 Square 7	6 Black			0445 4 / 45
2415 PA6, black A=28, B=4	2 SN+TUF	05 Square 8	07 Square 8 / slotted	3 IP66 - enclosed cam	0645 6 / 45	
		08 Square 8 / M6				0845 8 / 45
2416 Zinc, black coated A=28, B=4	4 EN+TUF	11 Square 8 / recessed	14 Triangle 7	4 IP54 - assembled	1045 10 / 45	
		15 Triangle 8				1245 12 / 45
2422 Zinc, chrome plated A=32, B=6	4 EN+TUF	16 Triangle 10	17 Triangle 10 / M5	5 IP66 - assembled	1445 14 / 45	
2425 PA6, black A=32, B=6		18 Triangle 10 / M6				1645 16 / 45
2426 Zinc, black coated A=32, B=6	4 EN+TUF	19 Triangle 10 / SEN	21 Triangle 10 - radius ES3	7 IP66 PUR - enclosed cam	1845 18 / 45	
		22 Double Bit 3				2045 20 / 45
2442 Zinc, PA6 collar A=28, B=4	4 EN+TUF	24 Double Bit 5	26 Slotted	8 IP66 PUR - assembled	2245 22 / 45	
		28 Slotted with arrow			2445 24 / 45	
		29 Slotted recessed			2645 26 / 45	
		31 Hexagon 8,5			2845 28 / 45	
		32 Hexagon 11			3045 30 / 45	
		34 Recessed hexagon 8			3245 32 / 45	
		35 Recessed hexagon 10			3445 34 / 45	
		36 Recessed hex 8 / 3 mm pin			3645 36 / 45	
		37 Solid plug			3845 38 / 45	
		38 Stockholm Energy			4045 40 / 45	
		39 Triangle 10 - radius			4245 42 / 45	

SN = Standard nut. EN = Earthing nut

TUF = Assembled with TUF-lock screw to achieve DIN EN 61373

To fulfill DIN EN 61373 the latch can be supplied with screw with mechanical thread lock, see column B (Nut).

PUR-gasket can only be supplied on housings 2412-\* and 2416-\*.

