



QUARTER-TURN COMPACT 13,5 MM

The quarter-turn latch is very versatile and can be used in a vast number of applications. You design the latch to accommodate your needs by combining your choices of housing, nut, insert, washer, screw and cam. The latch can be delivered un-assembled, pre-assembled with enclosed cam or fully assembled.

The latch is vibration resistant according to DIN EN 61373. Protection degree IP65 is achieved by an O-ring on the insert and a flat gasket on the housing.



MATERIAL

Cam and screw: Steel, zinc plated

Housing: Zinc die cast, chrome plated or black texture powder coated

Insert: Zinc die cast, chrome plated or black texture powder coated

Standard nut: Brass, zinc plated

Washer: Stainless steel 304

RELATED PRODUCTS

Other materials: 6-130

Keys: 2-372, 2-370


Handles and knobs: 2-111

Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Cutout: COMPACT

Standards: IP65, DIN EN 61373

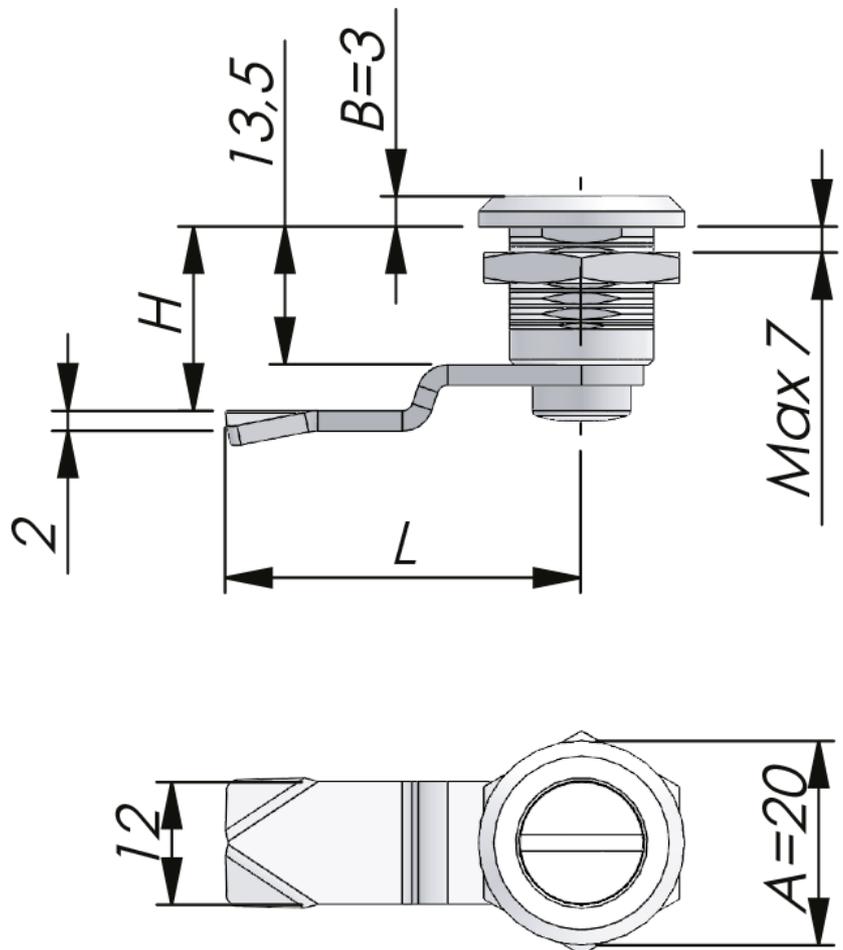


Industrilas
— When access counts —


Make your selections in each column to create your article number (AAAA-BCCDEF-HHLL)

AAAA Housing	B Nut	CC Insert	D Surface - insert	E Assembly	F Cam	HHLL H/L in mm	
2452 Zinc, chrome plated A=20 B=3	0 SN	01 Square 6	2 Chrome	2 IP54 - enclosed cam	0 Steel	0000 No cam	
	1 EN	02 Square 6 / M3	6 Black			0724 7,5 / 24	
2456 Zinc, black coated A=20 B=3	2 SN+TUF	13 Triangle 6,5		3 IP65 - enclosed cam		0727 7,5 / 27	
		26 Slotted				4 IP54 - assembled	0730 7,5 / 30
	33 Recessed hexagon 6	5 IP65 - assembled		0934 9 / 34			
							1027 10,5 / 27
							1324 13,5 / 24*
							1327 13,5 / 27*
				1627 16,5 / 27			
				1834 18 / 34			
				1924 19,5 / 24			
				1927 19,5 / 27			
				2824 28 / 24			

SN = Standard nut. EN = Earthing nut.

TUF = Assembled with TUF-lock screw to achieve DIN EN 61373.

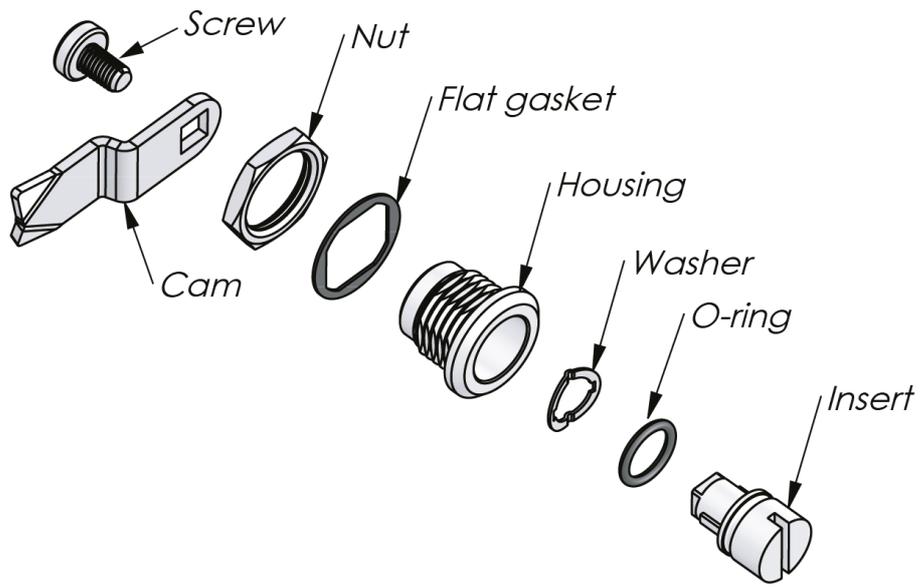

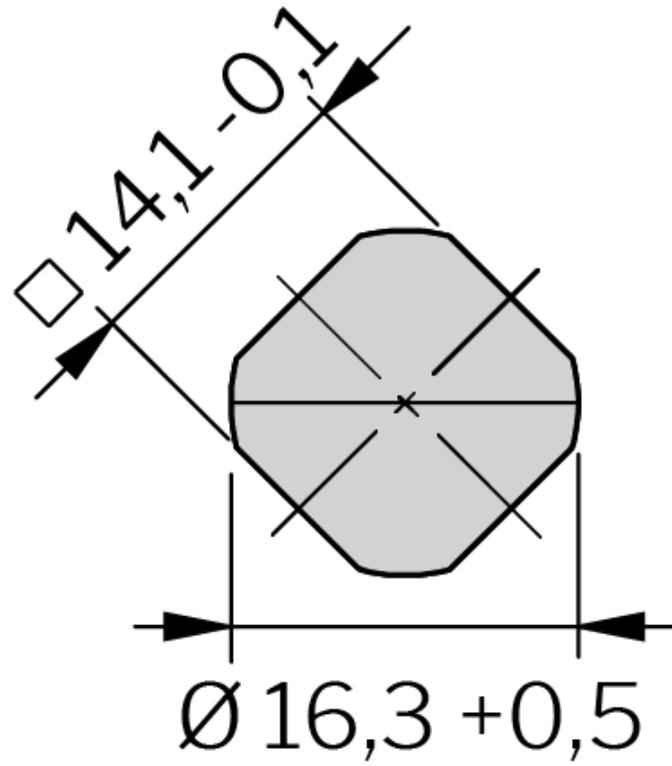

COMPACT