



Screw clamps v-klema type

Single aluminium




10-300SW

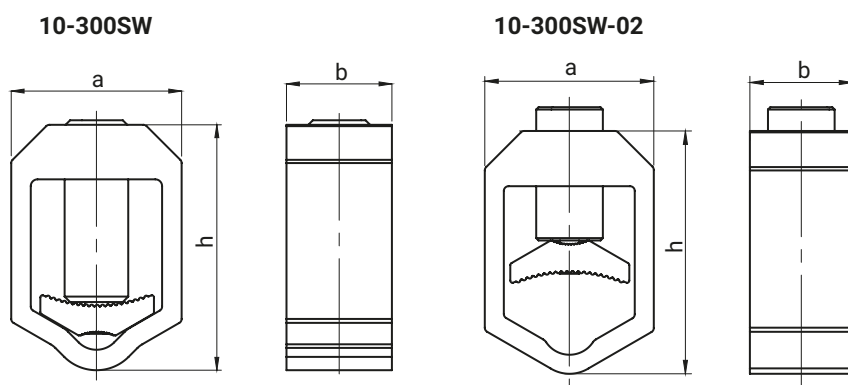

10-300SW-02

Possibility of changing the way the clamp is mounted

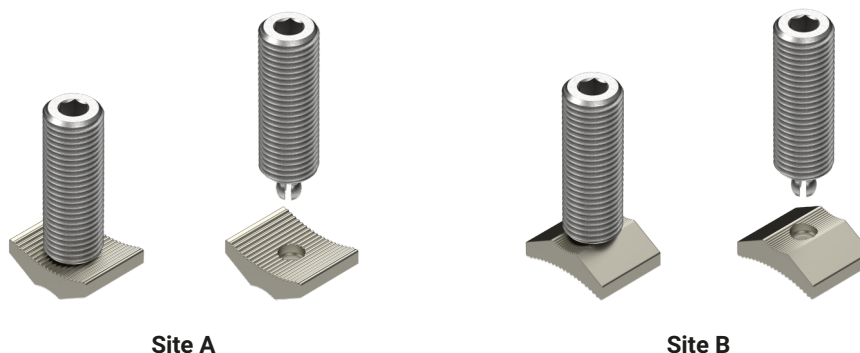

- sm** - multiwire sector shaped conductor (flexible) **rm** - round multiwire conductor (flexible)
se - sector shaped conductor (rigid) **re** - round conductor (rigid)

DETAIL	Site	CROSS-SECTION [mm ²]				NOMINAL CROSS-SECTION [mm ²]	MAX TIGHTENING TORQUE [Nm]	DIMENSIONS		
		sm	se	rm	re			a	b	h
10-300SW	A	25-120	25-120	10-95	10-95	150	15	37,5	23	54
	B	150-300	150-300	120-300	120-300	150	25	37,5	23	54

DETAIL	Site	CROSS-SECTION [mm ²]				NOMINAL CROSS-SECTION [mm ²]	MAX TIGHTENING TORQUE [Nm]	DIMENSIONS		
		sm	se	rm	re			a	b	h
10-300SW-02	A	25-120	25-120	10-95	10-95	150	15	35,5	21,5	51
	B	150-300	150-300	120-300	120-300	150	25	35,5	21,5	51

	10-300SW
clamp	Brass- zinc plated
housing	Aluminium (AlMgSi)
screw	Steel zinc-plated

SW - hexagon head socked

* Screw clamps conform to EN 60947-7-1 (IEC 60947-7-1)

* Screw clamp 10-300SW - current value $I_{th} = 309$ A