

VECTOR T1 HANDLE



Flush T-handle with a 4 mm compression stroke, in zinc or stainless version. Bolts are moulded into the dish for mounting with nuts on the inside. The Vector T-handle features two independent locking systems: key-locking cylinder and retractable padlock loop (\varnothing 8 mm) which prevents the handle being lifted or turned. Handle rotation 90° right, 90° left or 180° . Five different cam versions available and the handle is supplied with cylinder dust-cover. Protection degree IP65.

On request the handle can be supplied with a separate, unassembled cylinder. This will simplify handling and enable smooth adaptation to different key combinations for various needs.



MATERIAL

Adjustable cam: Zinc die cast, passivated

Body: Glass fibre reinforced polyamide (PA6GF30)

Cast-in bolts: Steel, zinc plated

Cylinder: Zinc die cast, stainless steel 304 cap and dust shutter

Handle: Zinc die cast, chrome plated, black texture powder coated or stainless steel 304, plain or black texture powder coated

Fixed cam: Steel, zinc plated

Padlock loop: Stainless steel 304

Roller: Glass fibre reinforced polyamide (PA6GF30)

Shaft: Steel, zinc plated or stainless steel 303

RELATED PRODUCTS

Similar products: 2-800, 2-820, 2-815, 2-811

Rods: 2-540, 2-541, 2-545

Rod guides: 2-560, 2-570

Rod adapters: 2-541

Accessories: 2-412


Use the Index Code at industrilas.com

TECHNICAL INFORMATION

Key extraction: Open / Closed

Cylinder information: Supplied with two keys
Maximum tightening torque 2,2 Nm.

Standards: IP65, DIN EN 61373

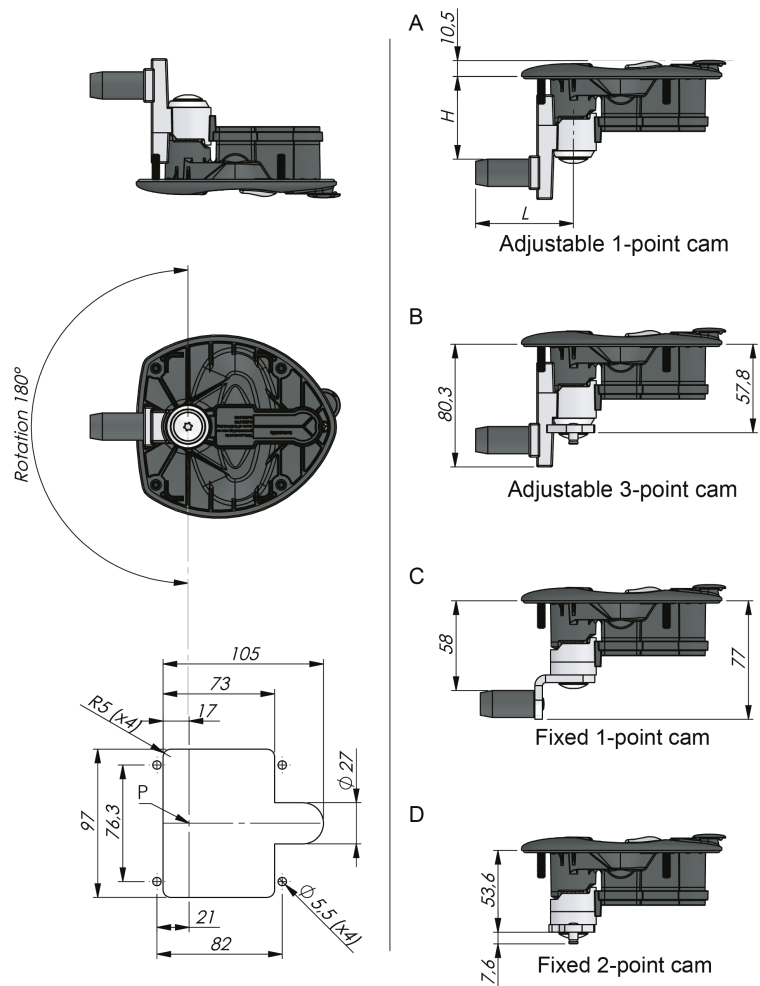

Industrilas
— When access counts —

Make your selections in each column to create your article number (AAAAAA-BBCDDDDD)

AAAAAA	Handle / Shaft	Handle	BB	Cylinder	C	Opening rotation	DDDDD	Cam	H=	L=	Drawing
272063	Zinc / Steel	Black	06	Keyed alike 751	H	90° clockwise	5861	* Fixed roller cam	58	61	C
272363	Zinc / Steel	Chrome			V	90° counter-clockwise	S5400	Two-point cam	-	-	D
273063	SS 304 / 303	Black	52	Keyed to differ			-	180°	S6685	* Fixed three-point roller cam	66
273963	SS 304 / 303	Plain	68	Keyed alike 805			S	Adjustable three-point roller cam	15-60	61	B
			69	Keyed alike 810			S1	Adjustable single point roller cam	15-60	61	A
			70	Keyed alike 815							
			71	Keyed alike 820							
			72	Keyed alike 825							
			73	Keyed alike 830							
			74	Keyed alike 835							
			75	Keyed alike 840							
			76	Keyed alike 845							
77	Keyed alike 850										
78	Keyed alike 455										

* Other dimensions on request.